

NSB 40FT Red Battery®

Long float life at elevated temperatures



Red Star Technology® uses pure lead plates to deliver exceptionally long float life even at elevated temperatures.

- Pure lead AGM technology delivers long float life for telecom applications even at elevated temperatures
- 15 year float life at 20°C (68°F)
- EUROBAT design life definition: Long Life (12+ years)
- High energy density
- Operating temperature range: -40°C to +65°C (-40°F to 149°F)
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation - female M6 brass terminals provide maximum performance
- 2 year shelf life at 25°C (77°F)
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures and maintain high battery compression essential for reliable operation
 - Non-halogenated, thermally sealed plastic casing
 - Flame retardant (UL 94 VO) and LOI of at least 28%
- Front access terminals ensure ease of installation and maintenance
- Approved as non-hazardous cargo for ground, sea, and air transport - DOT 49CFR173.159(d), (i) and (ii)

Visit our website to find out more www.northstarbattery.com



NSB 40FT Red Battery®

Nominal Technical Specifications



Electrical

| | International Standard 20°C (68°F) | North American Standard 25°C (77°F) |
|------------------------------|------------------------------------|-------------------------------------|
| 8 hour capacity to 1.75 VPC | 39 Ah | 39 Ah |
| 10 hour capacity to 1.80 VPC | 40 Ah | 40 Ah |
| Float Voltage | 2.29 +/- 0.02 VPC | 2.27 +/- 0.02 VPC |
| Nominal Voltage | 12 V | |
| Impedance [1kHz] | 5.4 mΩ @ 25°C [77°F] | |
| Conductance | 824 S | |
| Short Circuit Current | 1,500 A | |


Dimensions

| | | | |
|--------|-----------------|-----------------|--------------------|
| Height | 208 mm (8.2 in) | Weight | 14 kg (31 lbs) |
| Width | 97 mm (3.8 in) | Terminal | Female M6 x 1.0 |
| Depth | 250 mm (9.8 in) | Terminal Torque | 8.0 Nm (71 in-lbs) |

Ah Capacity Ratings @ 25°C (77°F)

| Capacity Discharge / hours | 1 | 2 | 4 | 8 | 10 |
|----------------------------|------|------|------|------|------|
| Capacity @ 25°C / Ah | 30 | 33 | 36 | 39 | 40 |
| End of Discharge / VPC | 1.70 | 1.75 | 1.75 | 1.75 | 1.80 |

Drawings

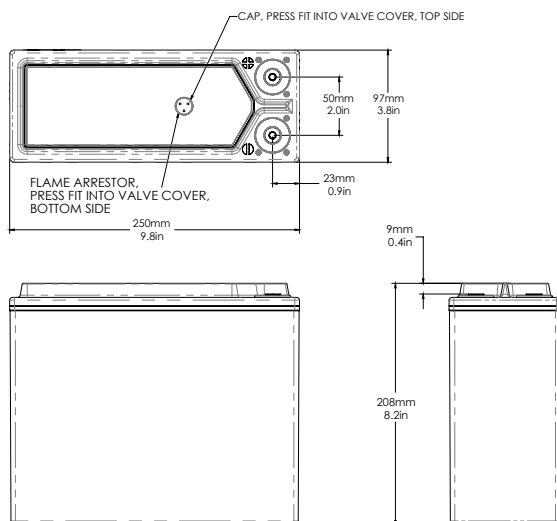

All NorthStar batteries are compliant with: Telcordia SR4228, IEC 60896; Bellcore GR-63-Core, Issue 1; British, German, and Russian telecom standards; UL approved. NorthStar is registered to ISO 9001 and ISO 14001.

NorthStar Americas

NorthStar Battery Company LLC
4000 Continental Way
Springfield, MD, 65803,
United States of America
info@northstarbattery.com
Tel: +1 417 575 8200
Fax: +1 417 575 8250

NorthStar Europe

SiteTel Sweden AB
Staffans Väg 8
SE-192 07 Sollentuna,
Stockholm, Sweden
europe@northstarbattery.com
Tel: +46 8 410 102 00
Fax: +46 8 638 06 00

NorthStar Middle East, Africa

SiteTel Sweden AB JTL Branch
Office 702, Saba 1 Tower
Jumeirah Lake Towers, Dubai
United Arab Emirates
mea@northstarbattery.com
Tel: +971 4 423 8060
Fax: +971 4 423 8061

NorthStar Asia-Pacific

NS Asia Pacific Sdn. Bhd.
B2-3A-13A, Solaris Dutamas
No. 1, Jalan Dutamas 1, 50480
Kuala Lumpur, Malaysia
asia@northstarsitetel.com
Tel: +60 3 6419 0711

www.northstarbattery.com

