


## TECHNICAL DATA

Voltage	12.00 V
Performance	65Ah C20 to 1.75V/cell at 25°C
Float Voltage	2.27V/cell at 20°C
Connection torque	na
Max Charge Current	13.00 A
Weight (Typical)	22.5 KG

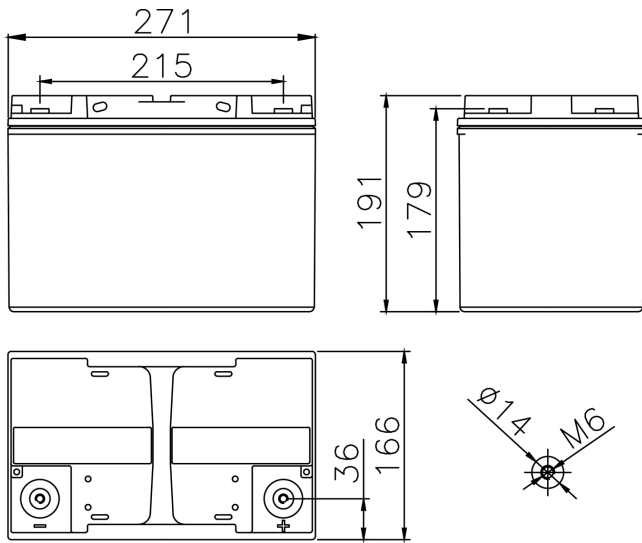

## ELECTRICAL PERFORMANCES

Constant Current Discharge Table [A] at 20°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
<b>1,60</b>	219	158	120	71,6	52,0	40,9	23,0	16,6		11,0			6,07
<b>1,65</b>	208	152	117	70,6	51,5	40,5	22,8	16,4		10,9			6,03
<b>1,67</b>	201	148	115	69,9	51,1	40,2	22,6	16,3		10,8			5,99
<b>1,70</b>	195	145	114	69,3	50,7	40,0	22,4	16,1		10,7			5,95
<b>1,75</b>	182	138	109	67,8	49,5	39,4	22,0	15,9		10,5			5,82
<b>1,80</b>	165	129	103	64,9	47,7	38,2	21,5	15,4		10,1			5,68
<b>1,85</b>													
<b>1,90</b>													

Constant Power Discharge Table [W/cell] at 25°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
<b>1,60</b>	365	269	209	130	96,3	76,7	43,8	31,7		21,1			11,7
<b>1,65</b>	348	261	205	129	95,8	76,1	43,4	31,5		21,0			11,7
<b>1,67</b>	338	256	203	128	95,1	75,7	43,2	31,3		20,9			11,7
<b>1,70</b>	327	250	201	130	94,5	75,3	42,8	31,1		20,7			11,6
<b>1,75</b>	365	239	193	125	92,7	74,6	42,4	30,8		20,5			11,4
<b>1,80</b>	279	224	184	120	89,8	72,6	41,5	30,1		19,9			11,2
<b>1,85</b>													
<b>1,90</b>													