



CBSW2-S

Main features:



Power from 180W up to 1050W

Voltage 12V, 24V, 36V and 48V selectable

Current from 15A to 40A

APPLICATIONS



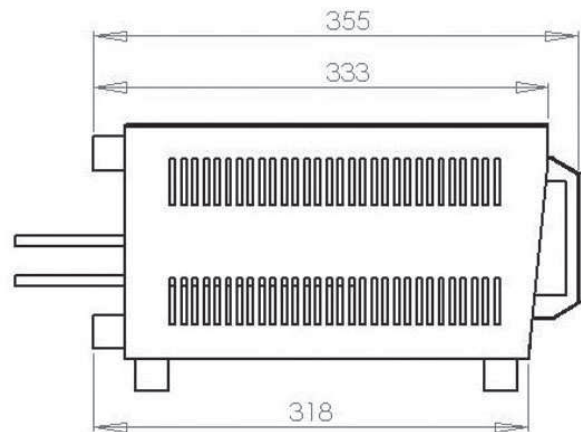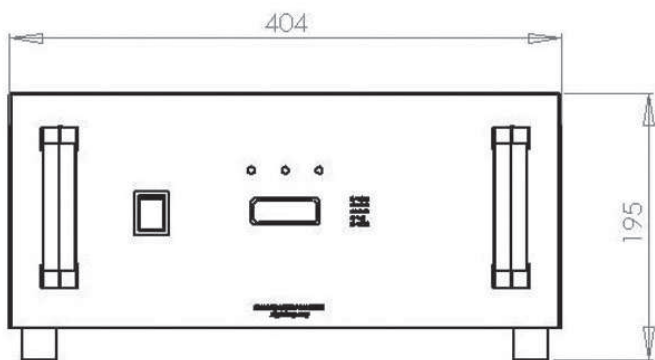

DIMENSIONS (LxWxH): 404x355x195 mm – 15.91x13.98x7.68 in
 WEIGHT: 15,80-22,80 Kg – 34.83-50.27 lbs
 PROTECTION GRADE IP20
 INPUT VOLTAGE: 115/240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	12-15
	120 ÷ 195 Ah	150 ÷ 235 Ah	20A	12-20
	180 ÷ 240 Ah	240 ÷ 320 Ah	25A	12-25
	260 ÷ 320 Ah	340 ÷ 425 Ah	30A	12-30
24V	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	24-15
	120 ÷ 195 Ah	150 ÷ 235 Ah	20A	24-20
	180 ÷ 240 Ah	240 ÷ 320 Ah	25A	24-25
	260 ÷ 320 Ah	340 ÷ 425 Ah	30A	24-30
36V	120 ÷ 180 Ah	155 ÷ 210 Ah	20A	36-20
	180 ÷ 240 Ah	240 ÷ 320 Ah	25A	36-25
48V	120 ÷ 195 Ah	150 ÷ 235 Ah	20A	48-20