



NSB 190FT BLUE+

AGM Thin Plate Lead Carbon



The NSB BLUE+ Battery® delivers ultra fast recharge and exceptional PSoC cycling performance.

- Exceptional PSoC cyclic performance 2050 cycles @50% DoD
- Design life 12+ years at 20°C (68°F)
- Ultra fast recharge
- Shelf life of up to 24 months
- Lead carbon added to negative electrodes increases power and reduces sulfation
- High potential fuel savings when used with hybrid genset applications
- Operating temperature range -40°C to +65°C (-40°F to 149°F)
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation - brass terminals provide maximum performance
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures and maintain high battery compression essential for reliable operation
- Non-halogenated thermally sealed plastic casing
- Approved as non-hazardous cargo for ground sea and air transport DOT 49CFR173.159(d), (i) and (ii)

NSB 190FT BLUE+

Nominal Technical Specifications


Dimensions

Height	320 mm	Width	125 mm
Length	560 mm	Weight	62 kg

Electrical

Terminal	Female M8 x 1.25
Terminal torque	8.0 Nm (71 in-lbs)
10 hr capacity to 1.80VPC @ 25°C (77°F)	183 Ah
8 hr capacity to 1.75VPC @ 25°C (77°F)	180 Ah
Float voltage @ 20/25°C (68/77°F)	2.28 / 2.27 VPC
Impedance (1Khz)	2.3 mΩ @ 25°C (77°F)
Conductance	2240 S
Short circuit current	6000 A
Maximum charge current (A)	No Limit
Operation temperature range	-40°C to +65°C
Nominal voltage	12 V

Technical Drawing

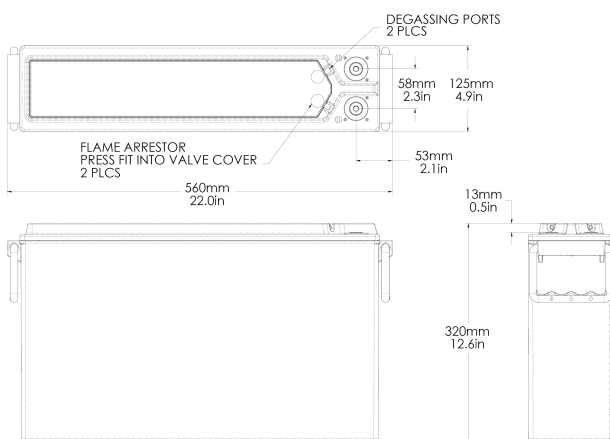

All NorthStar batteries are compliant with: Telcordia SR4228, IEC 60896; Bellcore GR-63-Core, Issue 1; British, German, and Russian telecom standards; UL approved and UN2800 certified. NorthStar is registered to ISO 9001 and ISO 14001.

NorthStar Americas PARTIAL
 NorthStar Battery Company LLC
 4000 Continental Way
 Springfield, MO, 65803,
 United States of America
info@northstarbattery.com
 Tel: +1 417 575 8200
 Fax: +1 417 575 8250

NorthStar Europe
 SiteTel Sweden AB
 Haukadalsgatan 8A
 SE-164 40 Kista,
 Stockholm, Sweden
europe@northstarbattery.com
 Tel: +46 8 410 102 00
 Fax: +46 8 638 06 00

NorthStar Middle East, Africa
 NorthStar Battery DMCC
 Office 702, Saba 1 Tower
 Jumeirah Lake Towers, Dubai
 United Arab Emirates
mea@northstarbattery.com
 Tel: +971 4 423 8060
 Fax: +971 4 423 8061

NorthStar Asia-Pacific
 NS Asia Pacific Sdn. Bhd.
 B2-3A-13A, Solaris Dutamas
 No. 1, Jalan Dutamas 1, 50480
 Kuala Lumpur, Malaysia
asia@northstarsitetel.com
 Tel: +60 3 6419 0711